

BRONX 2

ADJUSTMENTS ON GAME PG BOARD (VIDEO SHOOTING GUN MODEL)

H

4	GND
5	+5V
6	+5V
7	+5V
8	-5V

9 + 12

Pistola

T

COMPONENTS SIDE		SOLDER SIDE
GND	1	A
GND	2	B
GND	3	C
GND	4	D
SENSOR OUT	5	E
	6	F
POST	7	M POST
	8	J
	9	K
	10	L
	11	M
	12	M
	13	P
	14	R
	15	S
	16	T
+5V	17	U
+5V	18	V


G

COMPONENTS SIDE		SOLDER SIDE
GND	1	A GND
VIDEO(R)	2	B VIDEO(GND)
VIDEO(G)	3	C VIDEO(B)
VIDEO(SYNC)	4	D
	5	E
POST	6	F POST
	7	M
COIN SW	8	J
COIN METER	9	K
COIN LOCKOUT	10	L
SERVICE SW	11	M TILT SW
START SW	12	M
	13	P
	14	R
	15	S
	16	T
	17	U
	18	V
	19	M
	20	X VR1
TRIGGER SW	21	Y VR2
	22	Z VR3

X

1	SOUND OUT 1 (+)
2	SOUND OUT 1 (-)
3	SOUND OUT 2 (+)
4	POST
5	SOUND OUT 2 (-)

1

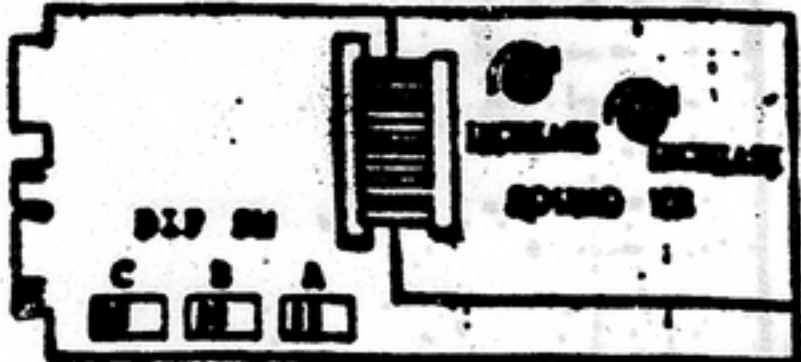

grip Ho

NOTE) BEFORE CHANGING THE SETTINGS OF THE DIP SWITCH, TURN THE POWER SWITCH OFF.

SETTING OF DIP SWITCH A

(*) : FACTORY SETTINGS

SETTING	POSITION	1	2	3	4	5	6	7	8
TEST MODE	GAME MODE			OFF					
	TEST MODE			ON					
ATTRACT SOUND	PRODUCED				OFF				
	NO PRODUCED				ON				
PLAY PRICING	1 coin / 1 play		OFF			OFF	OFF		OFF
	1 coin / 2 plays					ON			
	2 coins / 1 play					OFF	ON		
	2 coins / 2 plays					ON			

SETTING OF DIP SWITCH B

SETTING	POSITION	1	2	3	4	5	6	7	8
GAME DIFFICULTY A (EASY) - D (DIFFICULT)	D	OFF							
	A	ON	OFF						
	C	OFF	ON						
	B	ON							
BONUS POINTS 1ST/EVERY K=1,000 POINTS	150K/200K			OFF	OFF				
	200K/300K			ON					
	300K/400K			OFF	ON				OFF
	400K/500K			ON					
NUMBER OF PLAYERS	2					OFF	OFF		
	3					ON			
	4					OFF	ON		
	1					ON			

SETTING OF DIP SWITCH C

SETTING	POSITION	1	2	3	4	5	6	7	8
PLAYER SHOTS	8 SHOTS					OFF			
	FREE SHOTS (NO-FIN)			OFF		ON			OFF

CONNETTORE

PISTOLA

1	MASSA GND
2	SENSOR OUT
3	12V
4	12V

G. VERDE

ROSSO - CONNETTORE T (PIN 5)

BLU

GIALLO


NICHO

MASSA

GND G. Verde

PISTOLA

ROSSO - CONNETTORE T (PIN 5)

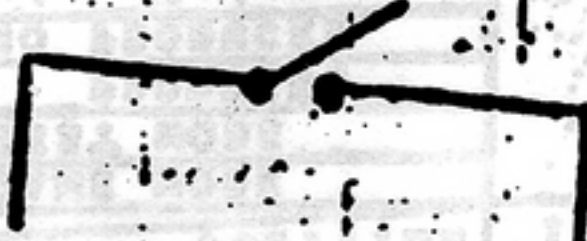

1	COND. GND 1-1
2	COND. GND 2-1
3	COND. GND 3-1
4	COND. GND 4-1

1	+15
2	-2A
3	+2A
4	+2A
5	CRD

1	COND. GND 1-1	COND. GND 1-1
2	COND. GND 2-1	COND. GND 2-1
3	COND. GND 3-1	COND. GND 3-1
4	COND. GND 4-1	COND. GND 4-1
5	COND. GND 5-1	COND. GND 5-1
6	COND. GND 6-1	COND. GND 6-1
7	COND. GND 7-1	COND. GND 7-1
8	COND. GND 8-1	COND. GND 8-1
9	COND. GND 9-1	COND. GND 9-1
10	COND. GND 10-1	COND. GND 10-1
11	COND. GND 11-1	COND. GND 11-1
12	COND. GND 12-1	COND. GND 12-1
13	COND. GND 13-1	COND. GND 13-1
14	COND. GND 14-1	COND. GND 14-1
15	COND. GND 15-1	COND. GND 15-1
16	COND. GND 16-1	COND. GND 16-1
17	COND. GND 17-1	COND. GND 17-1
18	COND. GND 18-1	COND. GND 18-1
19	COND. GND 19-1	COND. GND 19-1
20	COND. GND 20-1	COND. GND 20-1
21	COND. GND 21-1	COND. GND 21-1
22	COND. GND 22-1	COND. GND 22-1
23	COND. GND 23-1	COND. GND 23-1
24	COND. GND 24-1	COND. GND 24-1
25	COND. GND 25-1	COND. GND 25-1
26	COND. GND 26-1	COND. GND 26-1
27	COND. GND 27-1	COND. GND 27-1
28	COND. GND 28-1	COND. GND 28-1
29	COND. GND 29-1	COND. GND 29-1
30	COND. GND 30-1	COND. GND 30-1